

USER MANUAL COOL67 TOPMOUNTED 3D



Date: 05-04-2017

Version: 1.1

Cargo Control Company

De Harpen 2

4191 PE Geldermalsen

The Netherlands

DOCUMENT HISTORY

Version	Status	Date	Author	Remarks
0.1	Concept	08 Feb 2017	Armand	
0.5	For review	05 Apr 2017	Armand	
1.1	Address	14.10.2024	TP	

CONTENTS

1 Introduction3

 1.1 Preface3

 1.2 Common information.....3

 1.3 Notes to the operator3

 1.4 Reading instructions4

2 Usage of the Cool67 TopMounted 3D.....5

3 Maintenance8

4 Document information.....9

1 INTRODUCTION

1.1 PREFACE

This operating manual is an essential aid for the correct and safe use of the insulation partition walls.

This manual contains important information for reliable, proper and efficient use of the insulating partitions. Adherence to the manual helps to avoid dangers, reduce repair costs and downtime and increase the reliability and the lifetime of insulating walls.

The instructions must be available to the operating personnel at all times. Any person who is authorized to use the insulating walls reads the operating instructions before use and then applies them accordingly.

1.2 COMMON INFORMATION

Do not expose the Cool67 TopMounted 3D to outside weather conditions, extreme temperatures and direct sunlight.

Any change to the product makes the CE marking invalid. Please contact the manufacturer, if a modification of the product is necessary.

Loadlok reserves the right, if not being met to the requirements, to withdraw the guarantee of their product partially or entirely.

At the end of the lifecycle:

The end user can deliver the multi temp product to Loadlok. Loadlok provides environmentally sound disposal of their product and recycles parts if these are fit for reuse.

1.3 NOTES TO THE OPERATOR

This manual is an essential part of the insulating walls. The customer shall ensure that the operator adheres these instructions.

Note that in addition to the instructions, the laws of the country of the place of use are applicable and approved rules for accident prevention alongside with approved technical regulations for safe and professional work shall apply.

Any change to the product makes the CE marking invalid. Please contact the manufacturer, if a modification of the product is necessary.

1.4 READING INSTRUCTIONS



WARNING:



This is a warning of a potentially hazardous situation, resulting moderate or minor injury and / or property damage if the appropriate instruction is not followed exactly.



PAY ATTENTION:

This is a reference to useful information for the safe and effective use.

Orientation

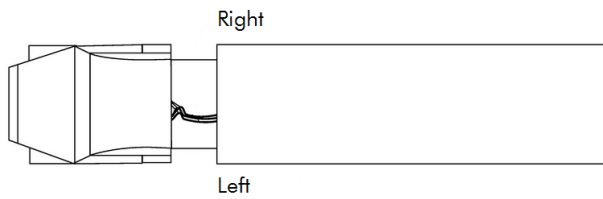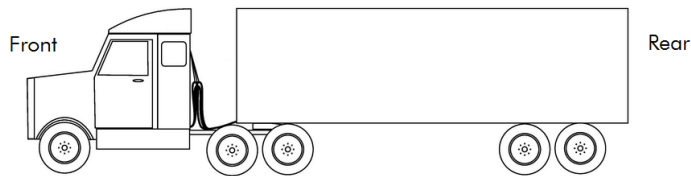

2 USAGE OF THE COOL67 TOPMOUNTED 3D

1



The Cool67 TopMounted 3D is in closed position with the floor locks on.

To move the bulkhead front to backwards, pull the straps continuously to release the breaks.

To raise the Cool67 TopMounted 3D, pull on the hand grips as shown and pull the bulkhead towards you.

2



The Cool67 TopMounted 3D in horizontal position against the roof.

The wall is held up by the force of magnets.

Use these grips to:

- Pull the wall downwards for closing
- Push the wall upwards into a parking position.

3



The panels can move from left to right to create an opening of 1/3 or 2/3 of the width.



WARNING:

The Cool67 TopMounted 3D is NOT intended as load securing device.

Please secure load according the standards for load securing

3 MAINTENANCE

Maintenance table			
Manifestation of the failure	Possible cause or procedure to detect the failure	Solution	Performed by (unskilled till certified)
The breakfingers are not locking in the center of the breaking hole		Adjust the breaking fingers according paragraph "Check the break functionality"	Mechanic

If the Cool67 TopMounted 3D is inspected on a regular basis on above mentioned inspection points the product lasts a lifetime.

4 DOCUMENT INFORMATION

Principal	Contractor	Digital file name
LoadLok Nederland B.V.	Foxiz BV	Manual

Remarks, corrections or suggestions are welcomed by the technical department.